



511



MODEL NO	PASLANMAZ (STAINLESS)	SİYAH (BLACK)	F1 (N)	F3 (N)	Fi VERİM YIELD (F1:Fi)	BASKI VİDASI (SQUEEZE SCREW)	STROK	AĞIRLIK (WEIGHT) (gr ±%2)
511-0-M	S 511 -	B 511 -	550	700	20:1	M4X25	23	88
511-0	S 511 -	B 511 -	550	700	20:1	M4X25	23	90
511-1	S 511 -	-	800	970	24:1	M5X35	22	145
511-2	S 511 -	B 511 -	1500	1700	26:1	M6X40	27	267
511-3	-	B 511 -	2500	2640	27:1	M8X50	38	482
511-5	-	B 511 -	3500	3700	38:1	M10X70	53	940
511-6	-	B 511 -	4500	4650	38:1	M12X80	53	1060
511-7	-	B 511 -	4500	5400	38:1	M12X80	51	1170

F1 : BASKI KUVVETİ (EXERTING FORCE) , F3 : TUTMA KAPASİTESİ (HOLDING CAPACITY) , Fi : UYGULAMA KUVVETİ (APPLIED FORCE)

Ayak Tipi: Yatay Tabanlı
Body Mounting Base: Horizontal

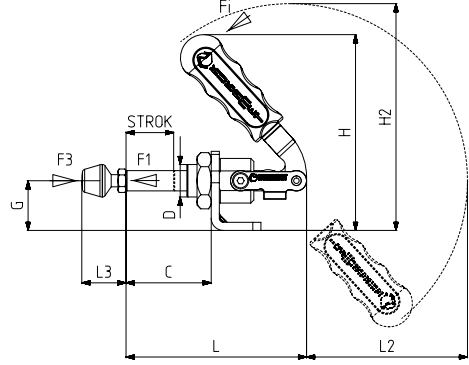

511-Y
Sayfa/Page: 70



512
Sayfa/Page: 71






513
Sayfa/Page: 72





918
Sayfa/Page: 141

511-0-M

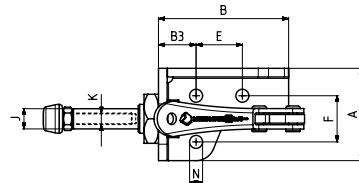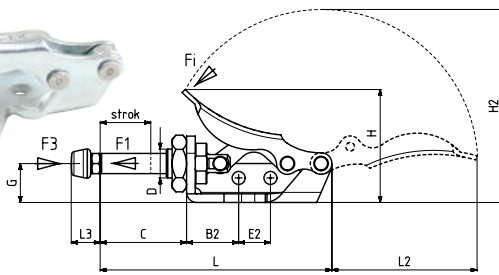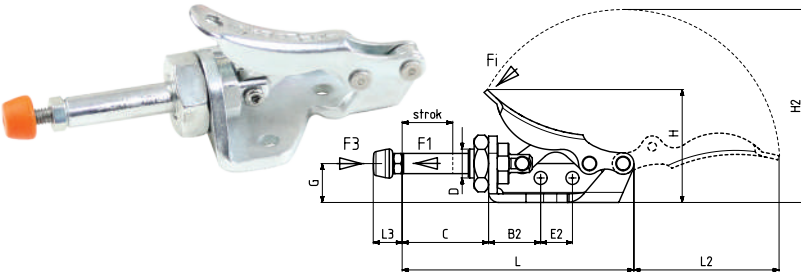

MODEL NO : 511-0-M
(KAPLAMASIZ METAL SAP)
(UNCOATED METAL HANDLE)

511-0

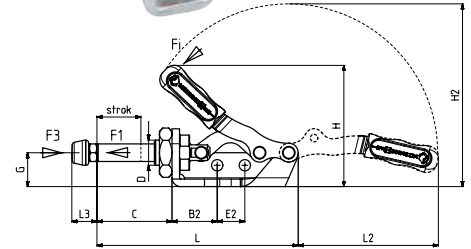

MODEL NO : 511-0

MODEL NO	A	B	B2	B3	C	D	E	E2	F	G	H	H2	J	K	L	L2	L3 Min	L3 Max	N
511-0-M	32	45	18	13	32	M10 x 1	16	11	16	13,5	39	67	Ø7	M4	82	50,5	10	25	Ø 4,5
511-0	32	45	18	13	32	M10 x 1	16	11	16	13,5	48	73	Ø7	M4	82	56	10	25	Ø 4,5
511-1	44	20	11,5	-	34	M12 x 1,5	26,5	-	-	19,5	79,5	92	Ø8	M5	73	68,5	15	38	5,5 x 10,5
511-2	53	24,5	15,5	-	42	M16 x 1,5	35	-	-	24,5	96	111	Ø10	M6	89	80	19	46	6 x 11
511-3	60	30	17,5	-	56	M20 x 1,5	38	-	-	30,5	137	140	Ø12	M 8	116	80	24	58	6,5 x 11
511-5	78	36	21	-	75	M24 x 1,5	49,5	-	-	38	152	179	Ø14	M10	155	135	32	74	8,5 x 16
511-6	78	36	21	-	75	M24 x 1,5	49,5	-	-	38	152	179	Ø16	M12	155	135	32	74	8,5 x 16
511-7	78	36	21	-	75	M27 x 1,5	49,5	-	-	38	152	179	Ø20	M12	155	135	32	74	8,5 x 16





MODEL NO	SİYAH (BLACK)	F1 (N)	F3 (N)	Fi VERİM YIELD (F1:Fi)	BASKI VİDASI (SQUEEZE SCREW)	STROK	AĞIRLIK (WEIGHT) (gr ±%2)
511 - 3 - L	B 511 -	2500	2640	27:1	M8X50	38	506
511 - 5 - L	B 511 -	3500	3700	38:1	M10X70	53	1000
511 - 6 - L	B 511 -	4500	4650	38:1	M12X80	53	1125

F1 : BASKI KUVVETİ (EXERTING FORCE) , F3 : TUTMA KAPASİTESİ (HOLDING CAPACITY) , Fi : UYGULAMA KUVVETİ (APPLIED FORCE)

Ayak Tipi: Yatay Tabanlı
Body Mounting Base: Horizontal Base

KİLİTLİ/LOCKED

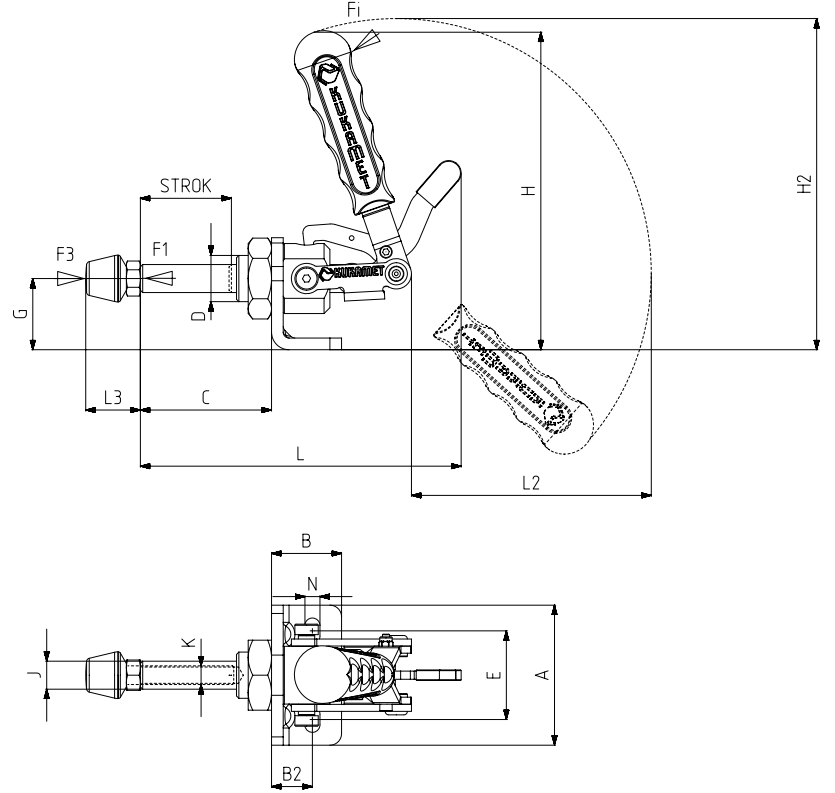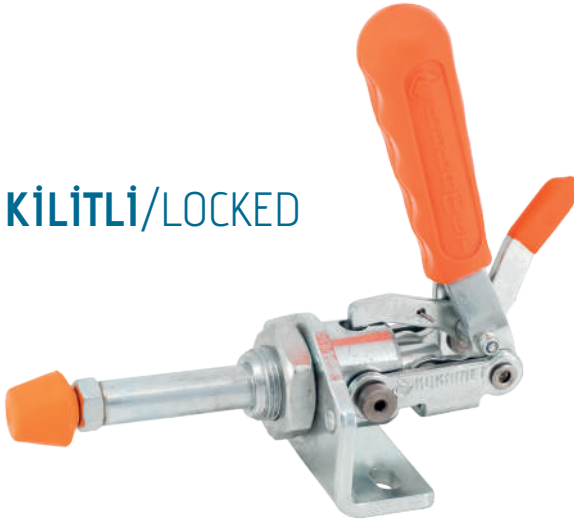

- 511 Sayfa/Page: 68 511-Y Sayfa/Page: 70 513 Sayfa/Page: 72 918 Sayfa/Page: 141



MODEL NO	A	B	B2	C	D	E	G	H	H2	J	K	L	L2	L3 min.	L3 max.	N
511 - 3 - L	60	30	17,5	56	M20 x 1,5	38	30,5	137	140	Ø12	M8	139	80	24	58	6,5 x 11
511 - 5 - L	78	36	21	75	M24 x 1,5	49,5	38	152	179	Ø14	M10	172,5	135	32	74	8,5 x 16
511 - 6 - L	78	36	21	75	M24 x 1,5	49,5	38	152	179	Ø16	M12	172,5	135	32	74	8,5 x 16



511-Y



MODEL NO	F1 (N)	F3 (N)	Fi VERİM YIELD (F1:Fi)	YAY STROK SPRING STROKE	STROK 1	AĞIRLIK (WEIGHT) (gr ±%2)
511 - 1 - Y	230	280	24:1	10	22	143
511 - 2 - Y	550	620	26:1	12	27	260
511 - 3 - Y	1100	1160	27:1	14	38	475
511 - 5 - Y	1850	1950	38:1	16	53	930
511 - 6 - Y	2200	2270	38:1	16	53	1040
511 - 7 - Y	2550	2650	38:1	20	51	1180

F1 : BASKI KUVVETİ (EXERTING FORCE) , F3 : TUTMA KAPASİTESİ (HOLDING CAPACITY) , Fi : UYGULAMA KUVVETİ (APPLIED FORCE)

Ayak Tipi: Yatay Tabanlı (Yaylı)
Body Mounting Base: Horizontal (Spring loaded)

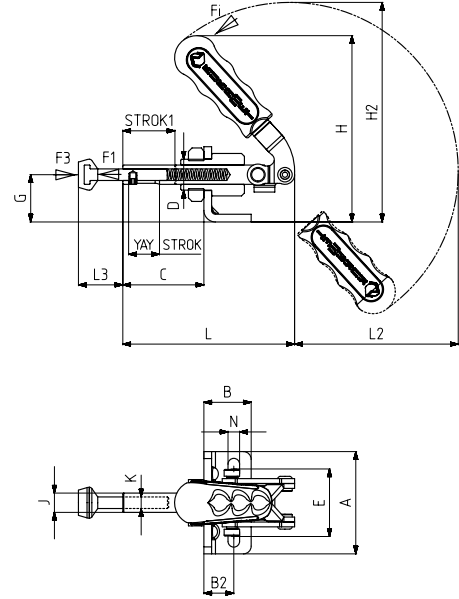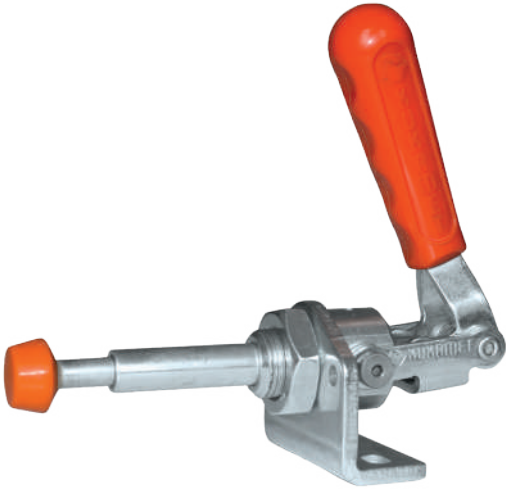

511
Sayfa/Page: 68




512
Sayfa/Page: 71



513
Sayfa/Page: 72



918
Sayfa/Page: 141

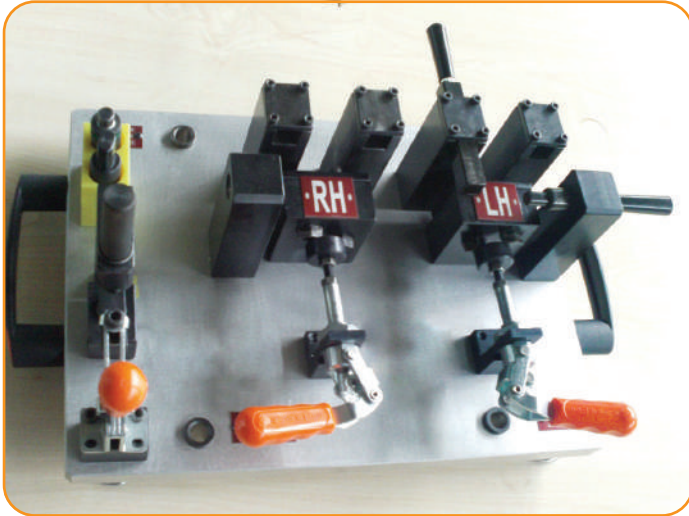

MODEL NO	A	B	B2	C	D	E	G	H	H2	J	K	L	L2	L3 min.	L3 max.	N
511 - 1 - Y	44	20	11,5	34	M12 x 1,5	26,5	19,5	79,5	92	Ø8	Ø5	73	68,5	11,5	21,5	5,5 x 10,5
511 - 2 - Y	53	24,5	15,5	42	M16 x 1,5	35	24,5	96	111	Ø10	Ø6	89	80	11	23	6 x 11
511 - 3 - Y	60	30	17,5	56	M20 x 1,5	38	30,5	137	140	Ø12	Ø8	116	80	13	27	6,5 x 11
511 - 5 - Y	78	36	21	75	M24 x 1,5	49,5	38	152	179	Ø14	Ø10	155	135	17	33	8,5 x 16
511 - 6 - Y	78	36	21	75	M24 x 1,5	49,5	38	152	179	Ø16	Ø10	155	135	17	33	8,5 x 16
511 - 7 - Y	78	36	21	75	M27 x 1,5	49,5	38	152	179	Ø20	Ø12	155	135	17	33	8,5 x 16