




MODEL NO	PASLANMAZ (STAINLESS)	SİYAH (BLACK)	F1 (N)	F3 (N)	Fi VERİM (YIELD) (F1:Fi)	BASKI VİDASI (SQUEEZE SCREW)	STROK	AĞIRLIK (WEIGHT) (gr ±2)
513 - 1	S 513 -	-	800	1500	24:1	M5 x 35	22	100
513 - 2	S 513 -	B 513 -	1500	3500	26:1	M6 x 40	27	195
513 - 3	-	B 513 -	2500	5500	27:1	M8 x 50	38	355
513 - 5	-	B 513 -	3500	7500	38:1	M10 x 70	53	710
513 - 6	-	B 513 -	4500	8500	38:1	M12 x 80	53	810
513 - 7	-	B 513 -	4500	8500	38:1	M12 x 80	51	941

F1 : BASKI KUVVETİ (EXERTING FORCE) , F3 : TUTMA KAPASİTESİ (HOLDING CAPACITY) , Fi : UYGULAMA KUVVETİ (APPLIED FORCE)

Ayak Tipi: Tabansız
Body Mounting Base: No Base

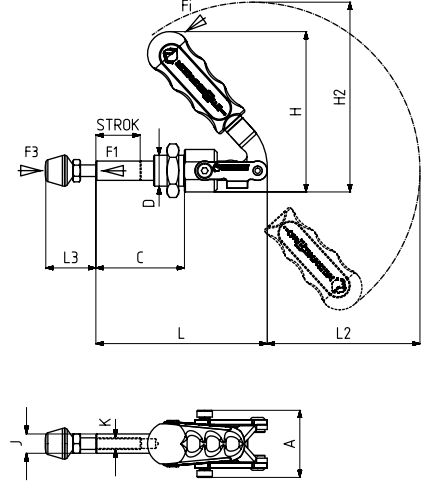


MODEL NO	A	C	D	H	H2	J	K	L	L2	L3 min.	L3 max.
513 - 1	32	37	M12 x 1,5	69	82	Ø8	M5	73	68,5	15	38
513 - 2	35	46	M16 x 1,5	81,5	97	Ø10	M6	89	80	19	46
513 - 3	43	61	M20 x 1,5	122	118	Ø12	M8	116	96	24	58
513 - 5	50	81	M24 x 1,5	131	159	Ø14	M10	155	135	32	74
513 - 6	52	81	M24 x 1,5	131	159	Ø16	M12	155	135	32	74
513 - 7	55	81	M27 x 1,5	131	159	Ø20	M12	155	135	32	74



Ayak Tipi: Tabansız
Body Mounting Base: No Base

KİLİTLİ/LOCKED

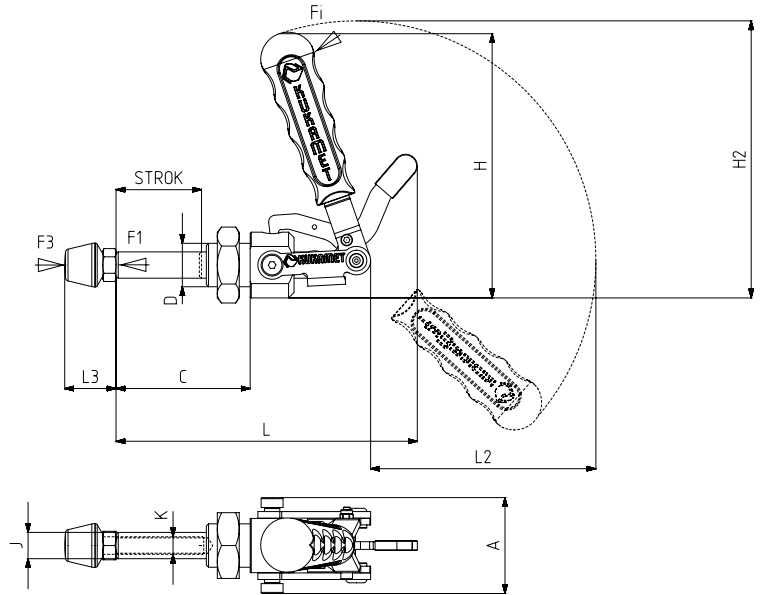

MODEL NO	A	C	D	H	H2	J	K	L	L2	L3 min.	L3 max.
513 - 3 - L	43	61	M20 x 1,5	122	118	Ø12	M8	139	96	24	58
513 - 5 - L	50	81	M24 x 1,5	131	159	Ø14	M10	172,5	135	32	74
513 - 6 - L	52	81	M24 x 1,5	131	159	Ø16	M12	172,5	135	32	74