



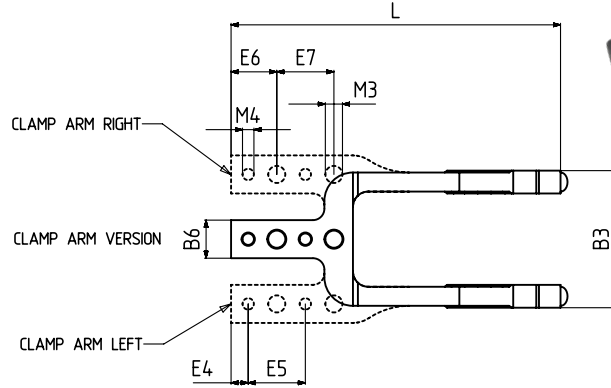

new

Power Clamp Çene

Power Clamp Jaw

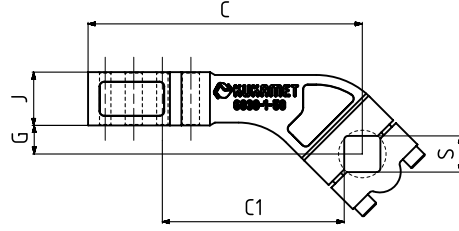

ORDERING EXAMPLE :

6030-1-50 (CLAMP ARM CENTER)
6030-1-50-R (CLAMP ARM RIGHT)
6030-1-50-L (CLAMP ARM LEFT)

MODEL NO	B3	B6	C	C1	E4	E5	E6	E7	G	J	L	M3	M4 (H7)	S
6030-1-50	72	20	144	95,5	9	30	24	30	14	30	173	9	6	19
6030-1-50-R	72	20	144	95,5	9	30	24	30	14	30	173	9	6	19
6030-1-50-L	72	20	144	95,5	9	30	24	30	14	30	173	9	6	19




ÜRÜN ADI VE KODU (PRODUCT NAME AND CODE)	MODEL NO	NOMİNAL ÇALIŞMA MESAFESİ (RATED OPERATING DISTANCE SN)	TEKRARLANABİLİRLİK (REPEATABILITY)	ORTAM SICAKLIĞI (AMBIENT TEMPERATURE)	ÇALIŞMA GERİLİMİ (OPERATING VOLTAGE)	ÇALIŞMA AKIMI (DC RATED OPERATIONAL CURRENT)	GÜÇ AÇIK GÖSTERGESİ (POWER-ON INDICATOR)	ANAHTARLAMA DURUMU (SWITCHING STATE)	AĞIRLIK (WEIGHT) (gr ±%)
TURCK NI2-Q9,5-AP6-0,1-FS4,4X3/S304	150 - 690	2mm	≤ 2 %	-25...+70 °C	10...30VDC	≤ 150 mA	YEŞİL	SARI / KIRMIZI	32




new

Nominal çalışma mesafesi Rated Operating Distance Sn

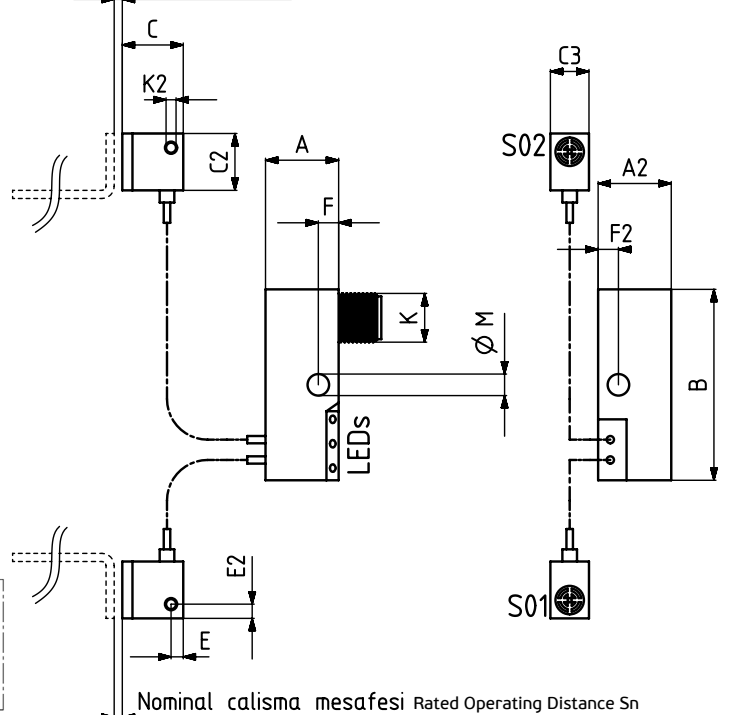

Power Clamp Sensör

Power Clamp Sensor





ÜRÜN ADI VE KODU (PRODUCT NAME AND CODE)	MODEL NO	A	A2	B	C	C2	C3	E	E2	F	K	K2	M
TURCK NI2-Q9,5-AP6-0,1-FS4,4X3/S304	150 - 690	18	18	47	15	14	9,5	3	3,5	5	M12x1	M3	5,3

6031





MODEL NO	SIKMA KUVVETİ (CLAMPING MOMENT) (at 5 bar) (Nm) F1	TUTMA KUVVETİ (HOLDING MOMENT) (Nm) F3	AĞIRLIK (WEIGHT) (gr ±%2)
6031 - 50	160	800	3500

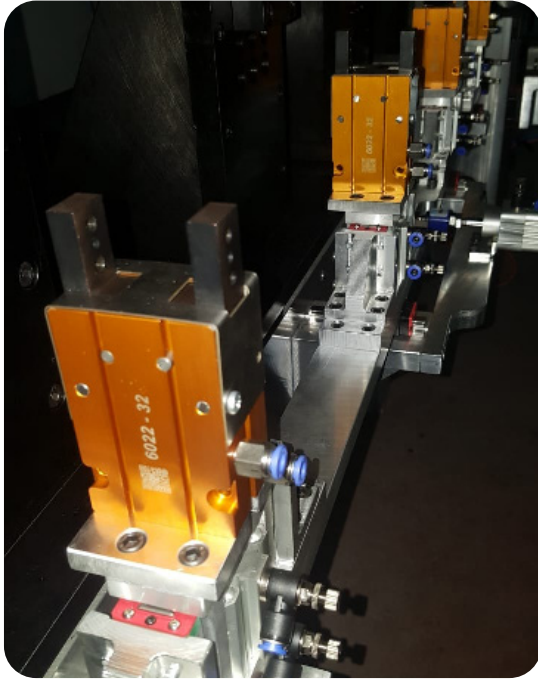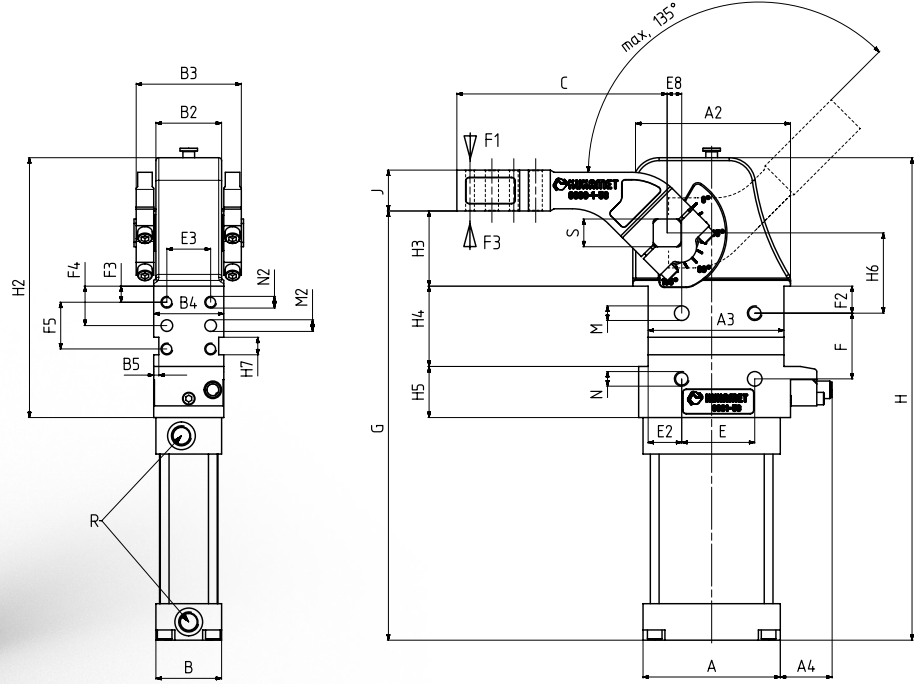

ORDERING EXAMPLE :

6031-50 (CLAMP ARM CENTER)
6031-50-R (CLAMP ARM RIGHT)
6031-50-L (CLAMP ARM LEFT)

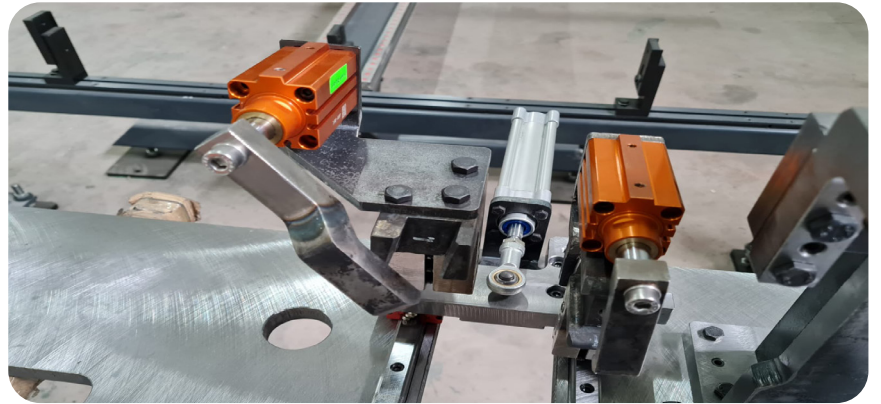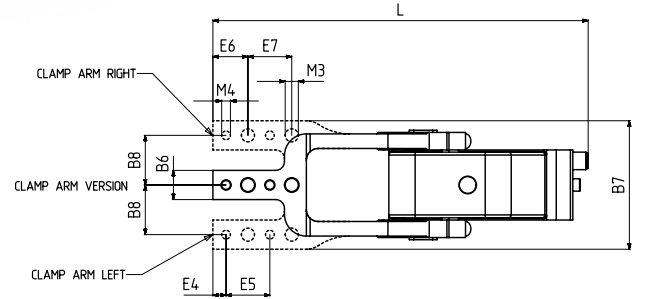

MODEL NO	A	A2	A3	A4	B	B2	B3	B4	B5	B6	B7	B8	C	E	E2	E3	E4	E5	E6	E7	E8
6031 - 50	94	108	93	35,5	45	45	72	48	3,5	20	88	34	144	50	23	30	9	30	24	30	10

MODEL NO	F	F2	F3	F4	F5	G	H	H2	H3	H4	H5	H6	H7	J	L	M (H7)	N	M2 (H7)	N2	M3	M4 (H7)	R	S
6031 - 50	45	18,5	11	27	32	294	330,5	178	50,5	55	35	55	12	30	257	Ø10	M10	Ø8	M8	9	6	G1/4	19